
NOTES:

- 1. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION DIMENSIONS (LOCATIONS), WASTE AND SUPPLY REQUIREMENTS OTHER THAN SHOWN.
- TO COMPLY WITH ANSI Z358.1-2014 FOR EMERGENCY EYEWASH OR EYE/FACE WASH: EYEWASH OR EYE/FACE WASH SHALL BE POSITIONED SUCH THAT FLUSHING FLUID PATTERN IS NOT LESS THAN 33" (838mm), NO GREATER THAN 53" (1346mm) FROM SURFACE ON WHICH USER STANDS, AND 6.0" (153mm) MINIMUM FROM WALL OR NEAREST OBSTRUCTION.
- $oxed{3}$ HEIGHT IS DETERMINED BY WATER FLOW PATTERN HEIGHT SHOWN, WHICH IN TURN, IS DEPENDENT ___ ON IN-LINE SUPPLY PRESSURE.
- 4 DRILL ONE Ø7/8" [22mm] HOLE AND TWO Ø5/32" HOLES WHERE UNIT IS TO BE INSTALLED. REFER TO MOUNTING HOLE DETAIL ON SHEET 2 OF 3 OR 3 OF 3.
- 5 ASSEMBLE EYE/FACE WASH TO ARM; ORIENT TAB ON ASSEMBLY AWAY FROM USER.
- 6. DIMENSIONS MAY VARY BY ±1/2" (13 mm).

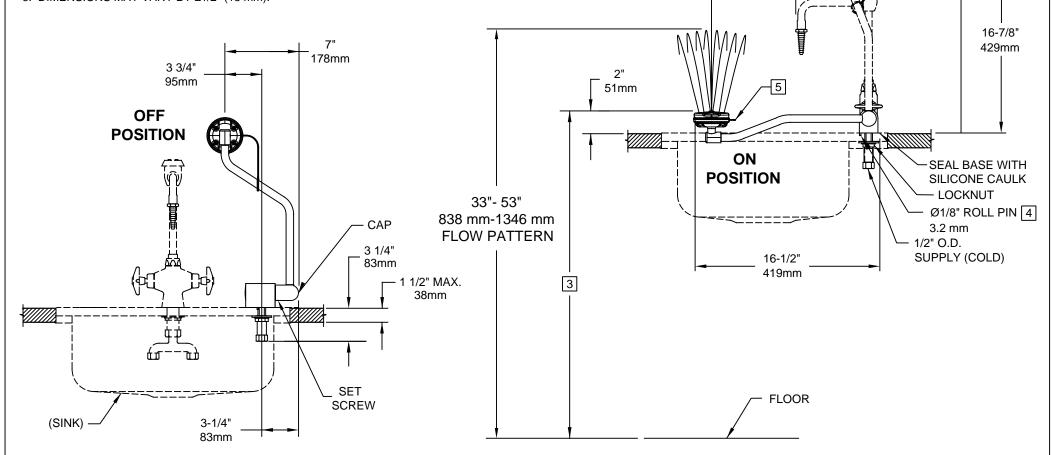

7610 DECK MOUNTED CONFIGURATION

(SEE SHEET 3 FOR 7610 DECK MOUNTED DETAIL)
(SEE SHEET 2 FOR 7610 WALL MOUNTED CONFIGURATION)

	1	<u> </u>	7	7	U L	H	w	S *	SPARKS (775) 359-471 E-MAIL: HA	WS@HÀ	A 8943 775) 359 WSCO.	-7424 COM	
Ī	ECN NO. REVISED PER BY: 2066			MODEL(S) 7610 PULLDOWN EYE/FACE				-	WEBSITE: WWW.HAWSCO.COM PART NUMBER 000208006 REVISION 19				
	MJ 09/12/18			SCALE:	1:1	DRAWING TYPE:	INS	TALLATION	SIZE: A	SHEET	1 OF	3	

2-3/8"

60mm

OFF


POSITION


152mm

MIN.

CLEARANCE

WALL

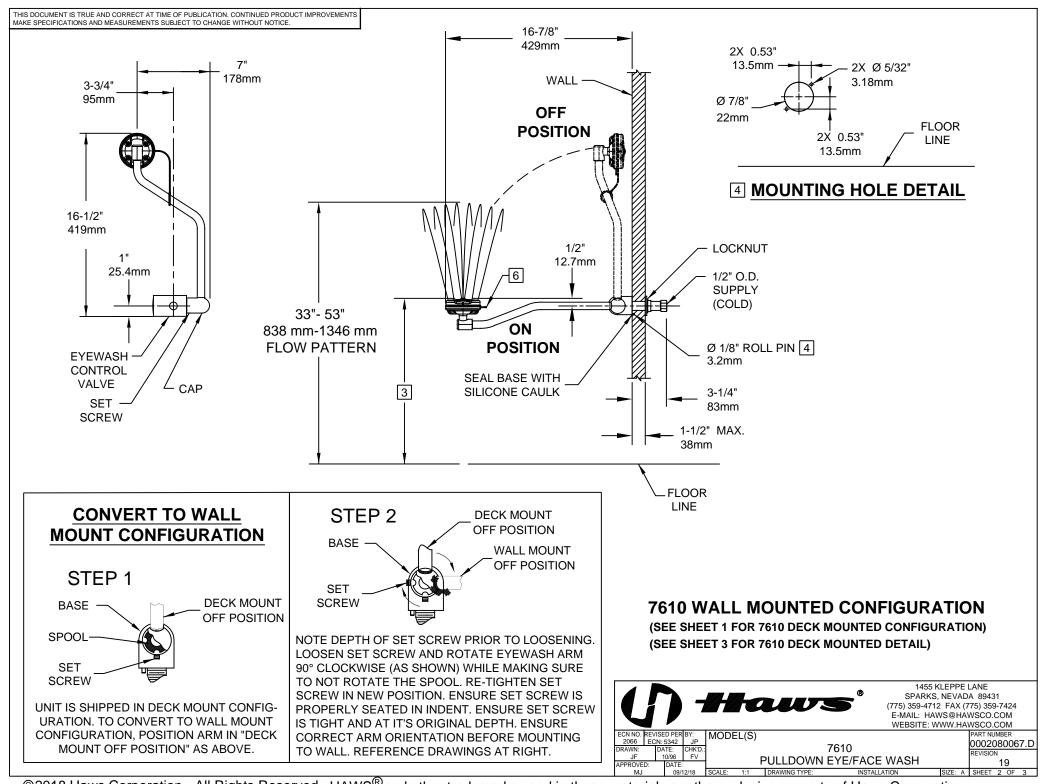

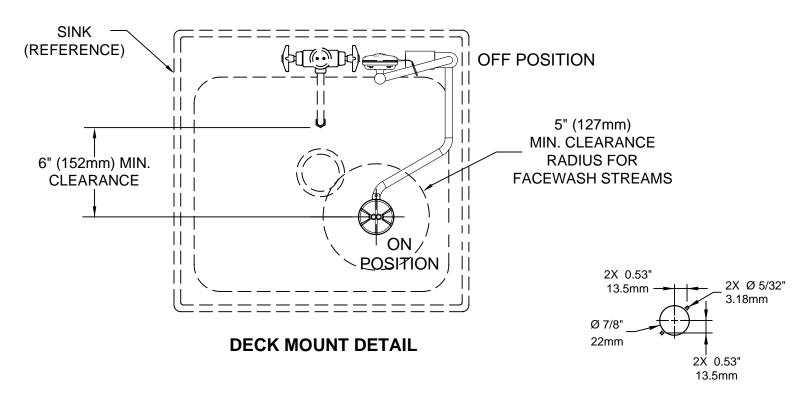

4 MOUNTING HOLE DETAIL

7610 DECK MOUNTED CONFIGURATION

(SEE SHEET 1 FOR 7610 DECK MOUNTED CONFIGURATION) (SEE SHEET 2 FOR 7610 WALL MOUNTED CONFIGURATION)

