Featuring Dynacheck® - Automatic and Continuous Self-Checking Circuitry



Sculcon Junction Box with Cable Assembly



Plug and Cable Assemblies

DESCRIPTION

Scully plugs are made of heavy duty molded polyurethane with stainless steel contacts. The fuel resistant cables are available in 30' coiled or 20' straight styles. Scully plugs and cables are the product of years of industry experience and offer durable, efficient operation. They are designed for use only with the intrinsically safe output circuits of Scully's ST-35, ST-15 and Intellitrol®.

Scully Plugs and Cables are used to connect the Scully loading rack control monitor to the vehicle mounted socket. The plugs and cables are the pathway for the control unit/sensor signals which monitor the status of overfill prevention, electro-static grounding and vehicle identification during loading operations.


FEATURES AND BENEFITS

- Extremely rugged design which can withstand harsh environments and mishandling.
- Non-removable socket locator pins fitted directly into the plug housing.
- Permanent socket locator pins that won't loosen or back out.
- Internal cable retention clamp to prevent cable pull-out or twisting.
- Molded glass-reinforced, polycarbonate contact block with positive locator keyways for easy disassembly and/or reassembly.

- Molded arrow on plug housing for easy visual alignment with socket.
- Stainless steel electrical contact, spring loaded to insure proper contact with the truck socket pins.
- Virtually indestructible polyurethane plug shell, color coded to match Scully truck sockets.
- Compression strain relief spring prevents the cable from bending or crimping.
- Heavy-duty petroleum resistant cable with higher visibility and cold weather flexibility.



For Safe and Reliable Rack to Vehicle Connection

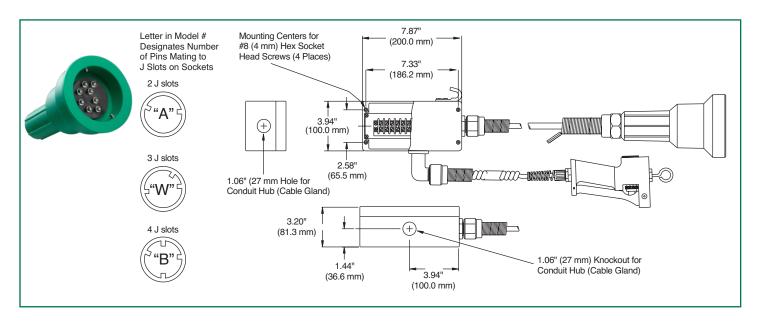

TECHNICAL SPECIFICATIONS

Environmental Temperature: 10 Conductor Cable:

-40°F to +140°F (-40°C to +60°C) White- 16 Guage

All Other– 18 Guage

Straight- 20 feet (6m) Coiled- 30 feet (9m)

The cables working length is enclosed in a fuel-resistant jacket. The cable is oil and gas resistant. Other lengths are available upon request.

Materials:

Plug Body: Polyurethane
Insulator: Polycarbonate
Contact Pins: Stainless Steel
Junction Box: Aluminum

Approvals:

These devices are part of an intrinsically

safe system certified by FM.



Sculcon	Applicable	Plug	# of Pins/Slots in	Plug and	Plug and	Coiled Cable	Straight Cable
Model	Controllers	Style	Mating Area	Coiled Cable	Straight Cable	w/J.Box	w/J.Box
SC-6A	Intellitrol, ST-15	Green	8 pins, 2 J slots ¹	21818	20830	08156	07582
SC-6A/D	Intellitrol, ST-15	Green	8 pins, 2 J slots	_	-	08248	_
SC-6W	Intellitrol, ST-35, ST-35C	Blue	6 pins, 3 J slots ²	21831	21764	08159	08139
SC-6W/D	Intellitrol, ST-35	Blue	6 pins, 3 J slots	_	-	08674	_
SC-6AO	Intellitrol, ST-35	Blue	6 pins, 2 J slots	21821	21820	08161	08160
SC-6OB	Intellitrol, ST-35	Blue	6 pins, 4 J slots	_	_	08689	_
SC-8A	Intellitrol	Green	10 pins, 2 J slots	31092	20831	08729	07581
SC-8BI	Intellitrol, ST-15	Green	10 pins, 4 J slots ¹	31494	32679		
SC-6	Intellitrol, ST-35	SAE J560-metal		20403	31107	07628	08603
Sculcon Jur	nction Box for General Purp	ose Part #	‡ 32319				

WOGA: Western States Petroleum Association; API: American Petroleum Institute. 1-API RP1004 Thermistor Standard, 2-API RP1004 WOGA Optic Standard.

Copyright © 2016 Scully Signal Company. Dynacheck, Dynamic Self-Checking, Dynamic Self-Testing, Faylsafe, IntelliCheck, Intellitrol are registered trademarks of Scully Signal Company. All Rights Reserved. Specifications are subject to change without notice.

60614 Rev F July 2016



Scully Signal Company

70 Industrial Way Wilmington, MA 01887, USA 800 272 8559 • sales@scully.com Scully Systems Europe NV

Maanstraat 25 2800 Mechelen, Belgium +32 (0) 15 56 00 70 • info@scully.be **Scully UK Ltd**

