


# Rosemount™ 389/389VP


## General Purpose pH/ORP Sensors

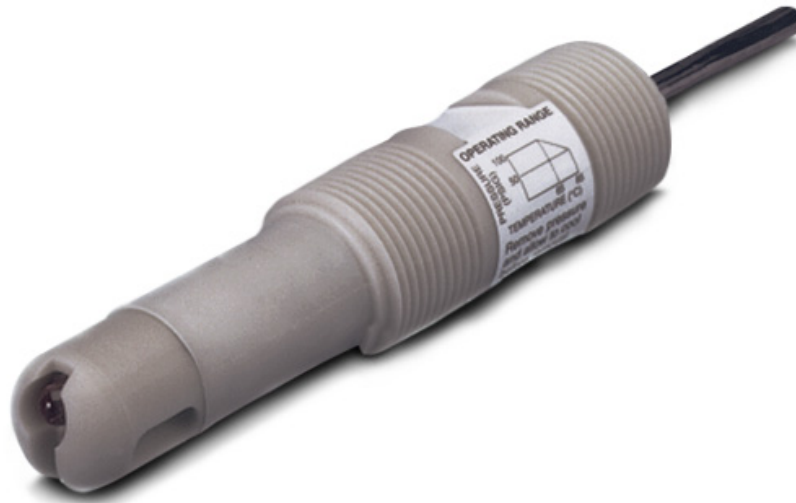

### Dependable pH/ORP measurements to solve your process needs

Rosemount 389/389VP sensors are suitable for use in a wide variety of applications. Reliably measure pH or Oxidation/Reduction Potential of aqueous solutions in pipelines, open tanks, and ponds. Rosemount 389/389VP sensors are ideal for use in process solutions containing poisoning ions.

# Overview

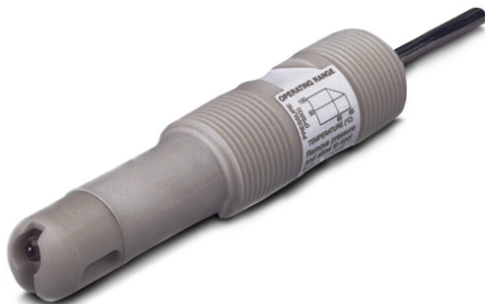

## Reliability Meets Robustness

- A triple junction reference prolongs sensor life and protects against poisoning ions such as ammonia, chlorine, cyanides, and sulfides.
- Enhanced performance and increased life with cracking resistant glass.
- Available with a glass electrode option for high pH applications.
- Superior chemical resistance provided by a rugged Tefzel body with Viton O-rings.

## Ease of Installation

- The molded sensor body features 1 in. MNPT front and rear facing process connections for insertion, submersion, and flow-through applications.
- Variopol (VP6) cable connection option, for quick cable-to-sensor release, eliminates cable twisting (389VP).

## Maintenance Made Simple

- Automatic recognition of pH sensors by Rosemount transmitters: 56, 1056, 1057, and 1066 with integral SMART preamplifier.
- pH calibration data is stored which allows sensors to be calibrated in advance for “Plug and Play” installations in the field.

---

## Contents

Overview .....	2	Product Certifications .....	7
Ordering Information .....	3	Dimensional Drawings .....	8
Specifications .....	5	Accessories .....	14

## Ordering Information



The Rosemount 389 and 389VP General Purpose pH/ORP Sensors are housed in a molded Tefzel body with 1 in. MNPT forward and rear facing threads suitable for insertion, submersion, or flow through installation. The sensors can be configured with a general purpose pH, high pH, or platinum ORP electrode. Rosemount 389/389VP sensors are offered with SMART preamplifiers for pH measurements and standard integral preamplifiers for ORP measurements. These sensors may be configured without a preamplifier but must be used with a remote preamplifier (j-box or transmitter). Automatic temperature compensation is standard. Sensors are available with either an integral cable connection (389) or Variopol (VP6) connector (389VP). Variopol cables sold separately (see [Accessories](#) ).

**Table 1. Rosemount 389 pH/ORP Sensor ordering information**

Model	Sensor Type
389	pH/ORP Sensor
<b>Preamplifier/Cable</b>	
01	Integral Preamplifier, 25 ft Cable <sup>(1)</sup>
02	No Preamplifier, 15 ft Cable
<b>Combination Electrode</b>	
10	pH - GPLR Glass
11	pH - High pH Glass
12	ORP
<b>Transmitter/TC Compatibility</b>	
50	1181, 1050, 1060 (code -01 or -02)
54	1054A/B, 81, 2081 (code -01 or -02); for 54, 56, 1055, 1056, 1057, 1066, 5081, 6081, XMT (code -02 only)
55	54, 56, 1055, 1056, 1057, 5081, 6081, and XMT (code -01 only)
<b>Optional</b>	
_	No Selection
62	Cable without BNC for Models: 54, 54, 1055, 1056, 1057, 1066, 5081, 6081, XMT (codes -02 and -54 only)
<b>Typical Model Number: 389-02-10-54-62</b>	

1. Preamplifier is SMART if selected with pH electrode and option 55 only. Preamplifier is standard for ORP electrodes and for options 50 and 54.

**Table 2. Rosemount 389VP pH/ORP Sensor ordering information**

Model	Sensor Type
389VP	pH/ORP Sensor
<b>Combination Electrode</b>	
10	pH - GPLR Glass
11	pH - High pH Glass
12	ORP
<b>Transmitter/TC Compatibility</b>	
50	1181, 1050, 1060 (code -01 or -02)
54	1054A/B, 81, 2081 (code -01 or -02); for 54, 56, 1055, 1056, 1057, 1066, 5081, 6081, XMT (code -02 only)
55	54, 56, 1055, 1056, 1057, 5081, 6081, and XMT (code -01 only)
<b>Preamplifier Option</b>	
_	No Preamplifier
70	SMART Preamplifier <sup>(1)</sup>
<b>Typical Model Number: 389VP-10-55-70</b>	

1. Only available with -10, -11, and -55 options.

## Specifications


**Table 3. Percent Linearity Over pH Range**

pH Range	GPLR Glass (-10)	High pH Glass (-11)
0 to 2 pH	94%	94%
2 to 12 pH	99%	97%
12 to 13 pH	97%	98%
13 to 14 pH	92%	98%

**Table 4. Rosemount 389/389VP pH/ORP Sensor specification**

Measurement Range	
pH	0 to 14
ORP	-1500 to +1500 mV
Temperature Range	
0 to 85 °C (32 to 185 °F)	
Automatic temperature compensation: 0 to 85 °C (32 to 185 °F)	
Maximum Pressure	
100 psig (790 kPa [abs]) at 65 °C (150 °F) – see <a href="#">Figure 1</a>	
Materials of Construction	
Sensor Body	Tefzel
pH Electrode	Glass
ORP Electrode	Platinum
Junction	Ceramic
O-ring	Viton
Process Connections	
Front Facing	1 in. MNPT
Rear Facing	1 in. MNPT
Cable	
389	Integral Preamplifier – 25 ft (7.8 m); No Preamplifier – 15 ft (4.6 m)
389VP	Use 24281-XX, 2.5 ft (0.8 m) to 100 ft (31m) (see <a href="#">Accessories</a> )
Weight/Shipping Weight	
0.45 kg/0.9 kg (1 lb/2 lbs)	

Figure 1. Pressure/temperature operating range for Rosemount 389/389VP

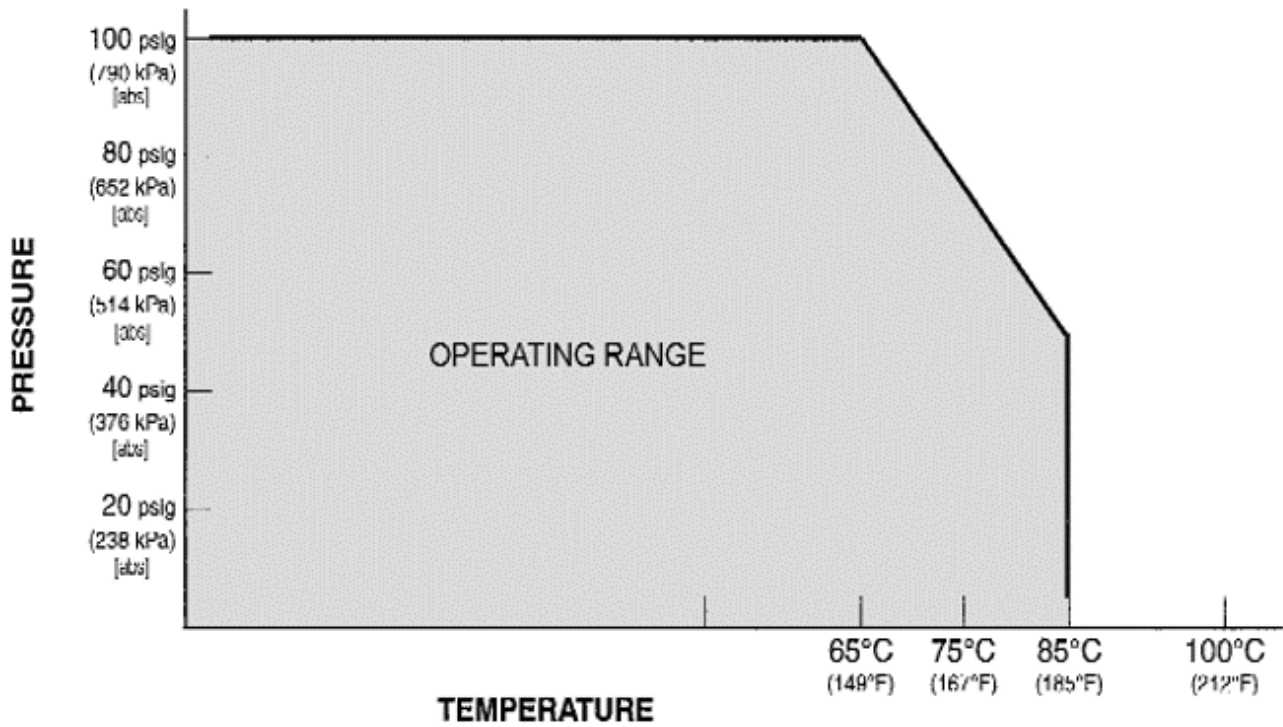

## Product Certifications

### IECEX


Sensors without preamp (pH and ORP) – Ex ia IIC T4 Ga (-20°C ≤ Ta ≤ +60°C)


Sensors with SMART preamp (pH only) – Ex ia IIC T4 Ga (-20°C ≤ Ta ≤ +60°C)

Sensors with standard preamp (ORP only) – Ex ia IIC T4 Ga (-20°C ≤ Ta ≤ +80°C) or Ex ia IIC T5 Ga (-20°C ≤ Ta ≤ +40°C)

Per standards IEC60079-0 : 2011, IEC 60079-11 : 2011

### ATEX

Sensors without preamp (pH and ORP) –  II 1 G Ex ia IIC T4 Ga (-20°C ≤ Ta ≤ +60°C)

Sensors with SMART preamp (pH only) –  II 1 G Ex ia IIC T4 Ga (-20°C ≤ Ta ≤ +60°C)

Sensors with standard preamp (ORP only) –  II 1 G Ex ia IIC T4 Ga (-20°C ≤ Ta ≤ +80°C) or  II 1 G Ex ia IIC T5 Ga (-20°C ≤ Ta ≤ +40°C)

Per standards EN 60079-0: 2012+A11:2013, EN 60079-11:2012

### FM

See online FM Certificate of Compliance for applicable sensor options:

Intrinsically Safe for use in Class I, II, and III, Division 1, Groups A, B, C, D, E, F, and G; Temperature Class T6 Ta = -20°C to +60°C

Intrinsically Safe for use in Class I, Zone 0, AEx ia IIC T6 Ta = -20°C to +60°C

Nonincendive for use in Class I, Division 2, Groups A, B, C, and D; Temperature Class T6 Ta = -20°C to +60°C

Suitable for use in Class II and III, Division 2, Groups E, F, and G; Temperature Class T6 Ta = -20°C to +60°C Hazardous (Classified) Locations IS/I,II,III/1/ABCDEFG/T6 Ta = 60°C - 1400332; Entity; I/O/AEx ia IIC/T6 Ta = 60°C - 1400332; Entity; NI/I/2/ABCD/T6 Ta = 60°C; S/II,III/2/EF/T6 Ta = 60°C; Entity Parameters

Per standards 3600:1998, 3610:2010, 3611:2004, 3810:2005

### CSA

See online CSA Certificate of Compliance for applicable sensor options

Intrinsically Safe:

Class I, Division 1, Groups ABCD; Class II, Division 1, Groups EFG; Class III; Class I, Division 2, Groups ABCD; Ambient temperature rating -20°C to +60°C; Ex ia IIC; T6

Intrinsically Safe and Non-Incendive:

Class I, Division 1, Groups ABCD; Class II, Division 1, Groups EFG; Class III; Class I, Division 2, Groups ABCD; Ex ia IIC; T6; Ambient temperature rating -20°C to +60°C: (Simple Apparatus)

Per standards C22.2 No. 0-10, C22.2 No. 0.4-M2004, C22.2 No. 94-M1991, C22.2 No. 142 – M1987, C22.2 No. 157 – M1992, CAN/CSA E60079-0:07, CAN/CSA E60079 - 11:02, UL50 11th Ed, UL508 17th Ed, UL913 7th Ed, UL 60079-0: 2005, UL 60079-11: 2002

# Dimensional Drawings

Figure 2. Rosemount 389 with integral cable connection dimensional drawing

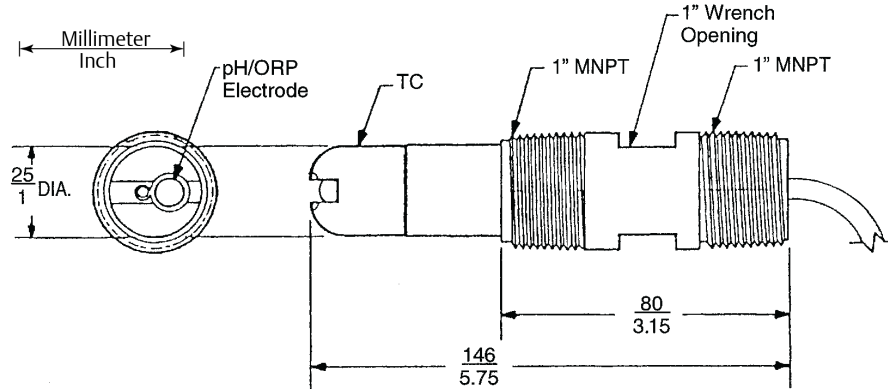


Figure 3. Rosemount 389VP with Variopole cable connection dimensional drawing

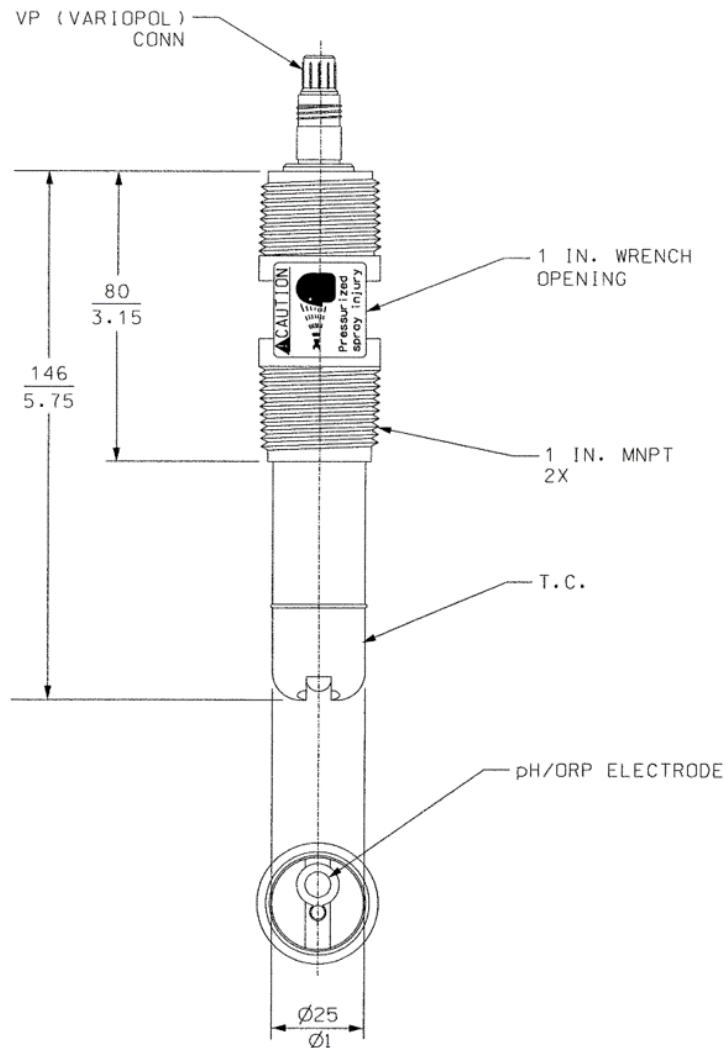




Figure 4. Flow through and insertion installations

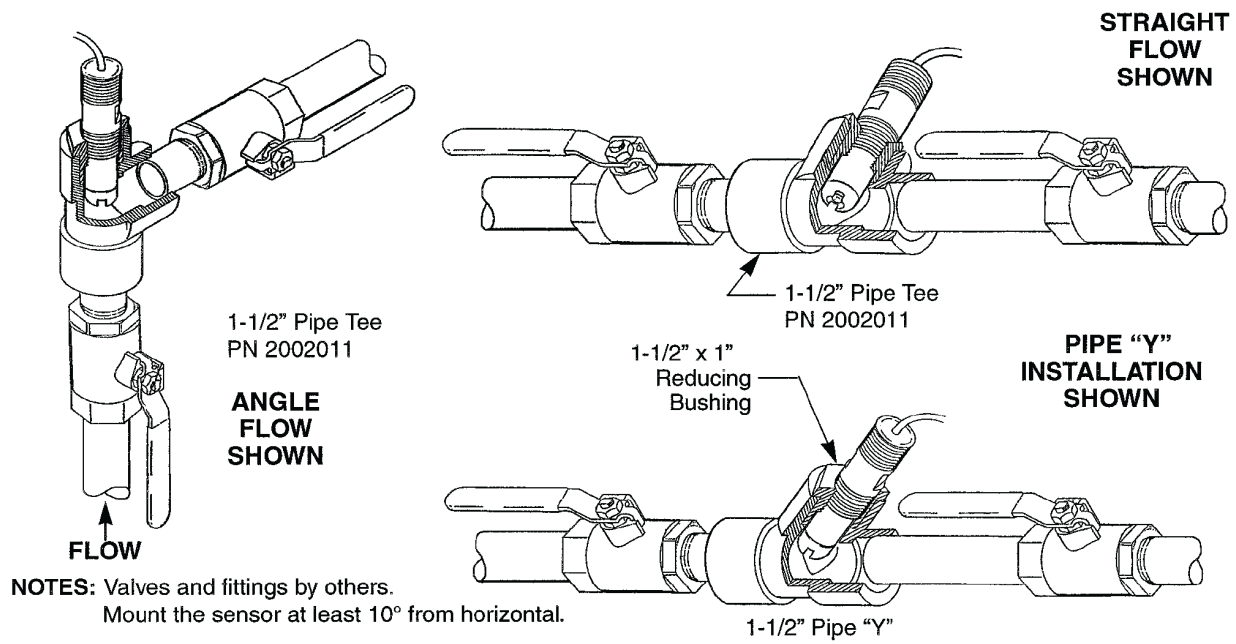


Figure 5. VP8 cable, instrument end

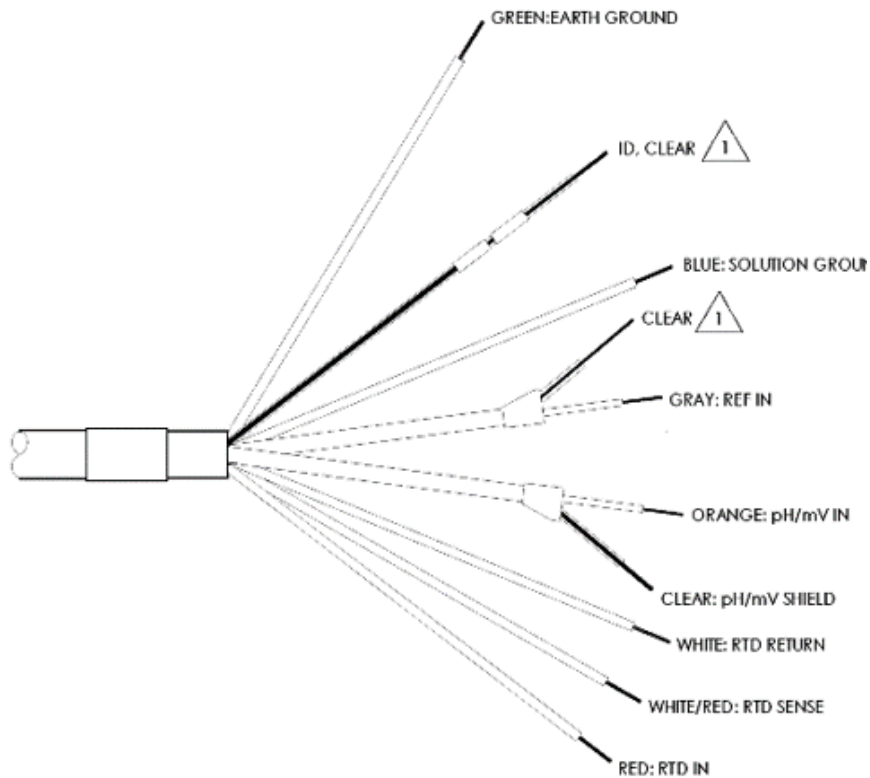


Figure 6. VP8 cable, sensor end


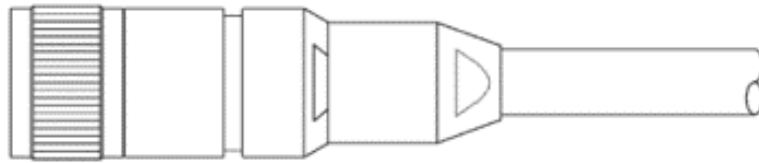


Figure 7. Submersion installation - Junction box and pipe mounting accessory

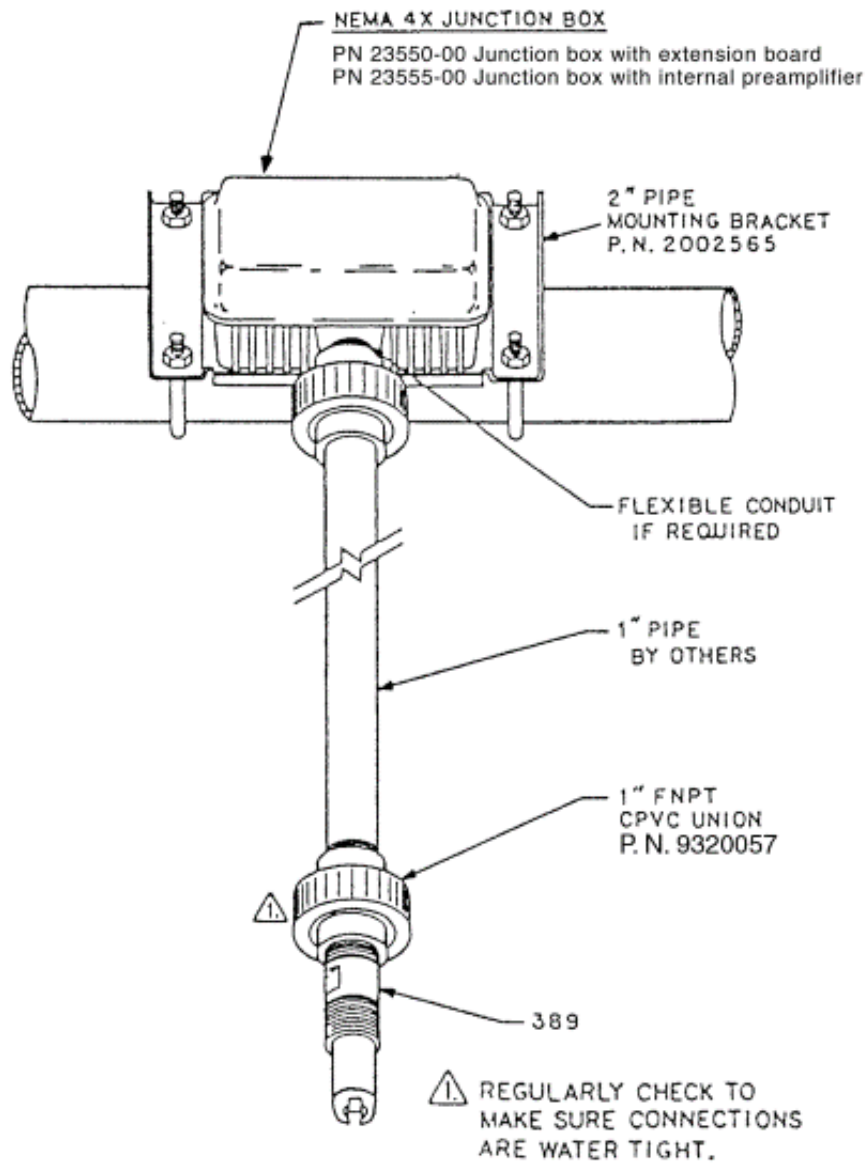

NOTES: UNLESS OTHERWISE SPECIFIED

Figure 8. Submersion installation - Handrail mounting accessory (PN 11275-01)



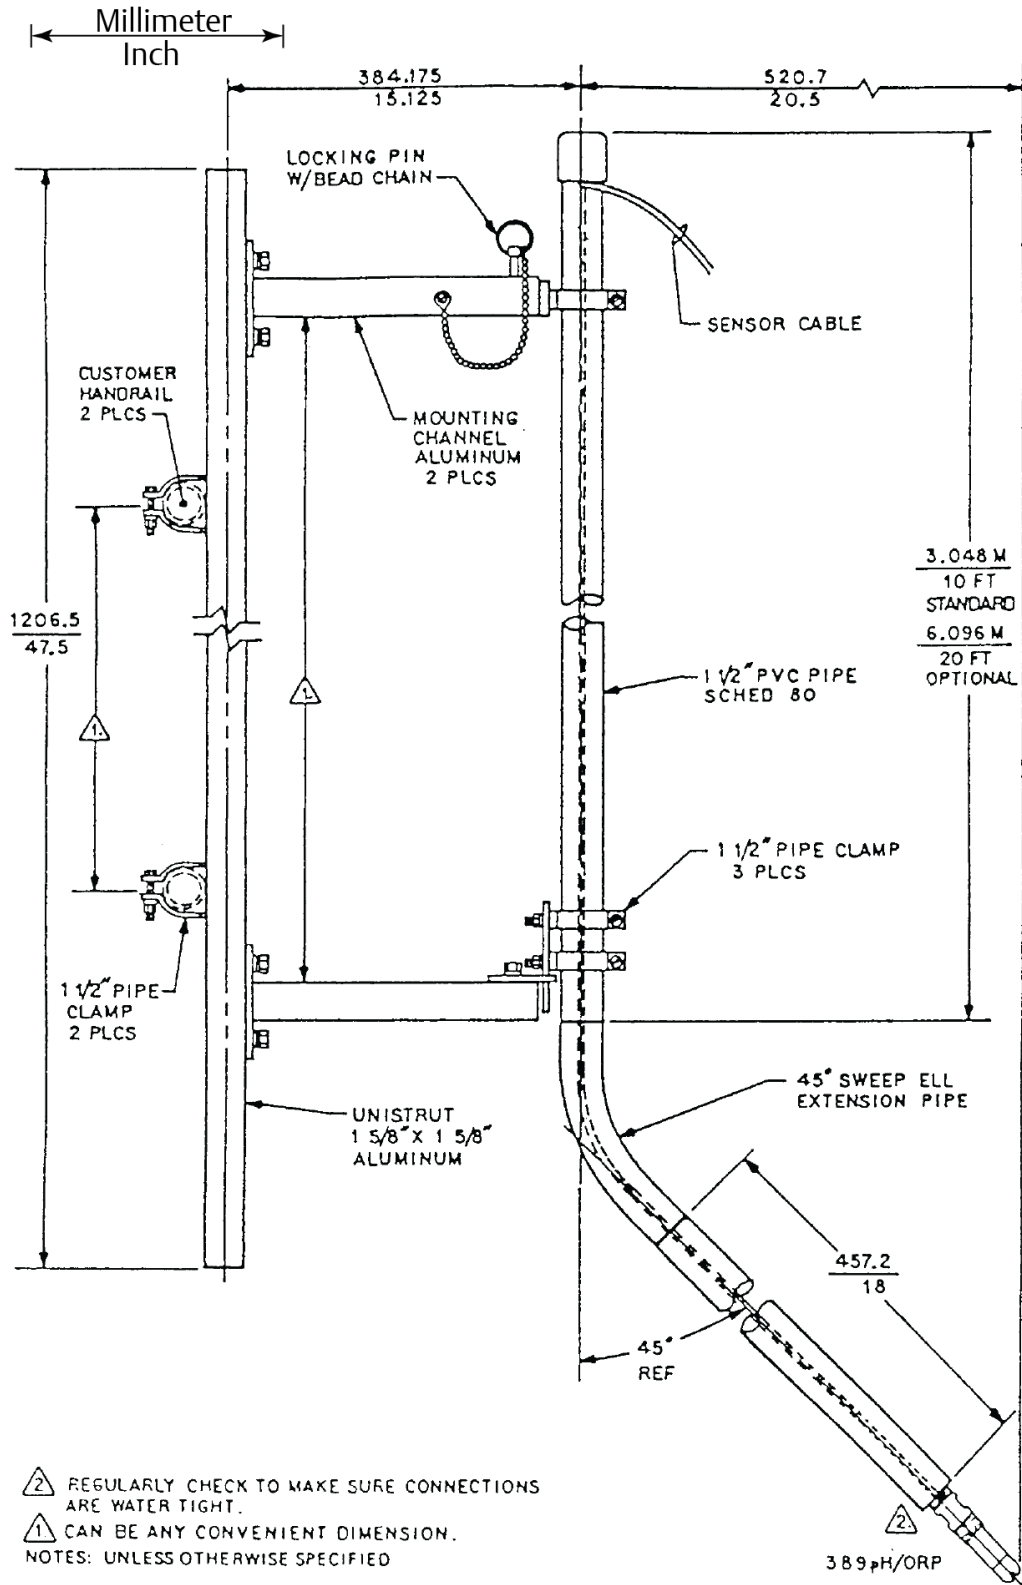


Figure 9. Rosemount 389 with insertion adapter (PN 23242-02)

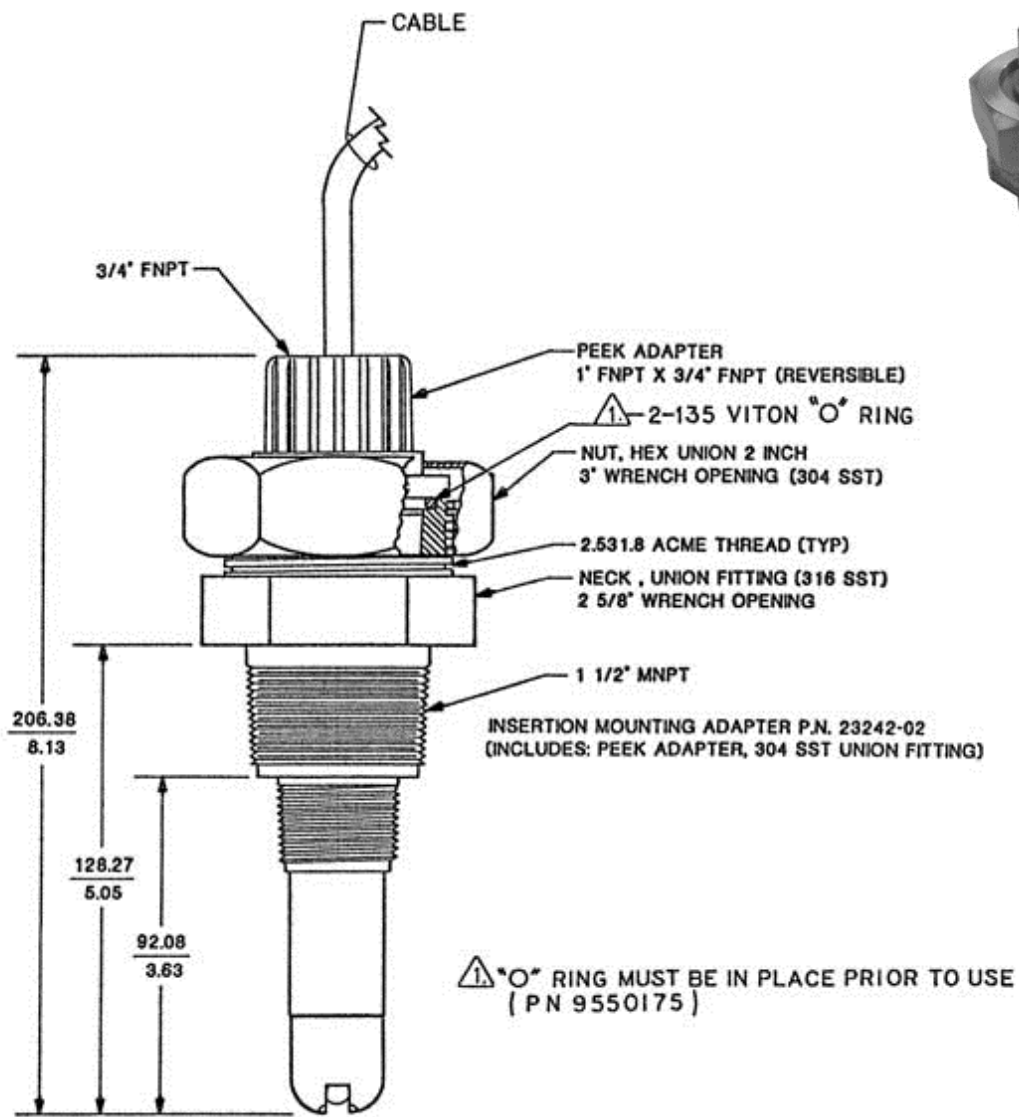

The insertion adapter mounts the sensor into a 1½ in. NPT process pipe. Unscrewing the hex nut allows easy sensor removal without twisting the sensor cable.

Figure 10. Low flow cell (PN 24091-00)

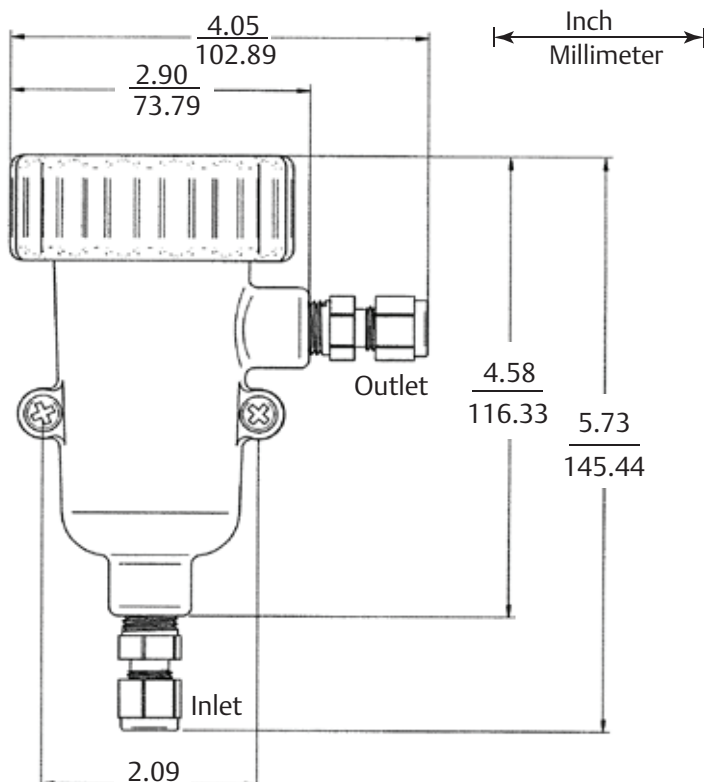

Inlet and outlet connections are stainless steel and take ¼-in. OD tubing. Flow cell is polycarbonate with ¼-in. FNPT fittings.

Table 5. Low flow cell specifications (PN 24091-00)

<b>Wetted Materials</b>	
Body and Nut	Polyester/Polycarbonate
Fittings	316 SST
Seals	Silicone
<b>Flow Cell Ratings</b>	
Temperature	32 to 158 °F (0 to 70 °C)
Maximum Pressure	90 psig (721 kPa [abs])
Flow Rate	2 to 5 GPH (7.6 to 18.9 LPH)
<b>Sensor Threaded Connection</b>	
1 in. NPT Adapter	

## Accessories

**Table 6. Rosemount 389/389VP pH/ORP Sensor accessories information**

Part number	Description
11275-01	Handrail Mounting Assembly
12707-00	Jet Spray Cleaner
2002011	CPVC In-Line Tee, 1.5 in. Size, 1.0 in. Threaded Process Connection Ends
915240-03	PVC In-Line Tee, 2.0 in. Size, ¾ in. Threaded Process Connection Ends
915240-04	PVC In-Line Tee, 2.0 in. Size, 1.0 in. Threaded Process Connection Ends
915240-05	PVC In-Line Tee, 2.0 in. Size, 1.5 in. Threaded Process Connection Ends
23242-02	Insertion Mounting Adapter, 1.5 in. MNPT Process Connection, 1 in. x ¾ in. FPT Sensor Adapter/Union Thread Size
33081-00	PEEK Adapter Insert, 1 x ¾ in., for 23242-02
23646-01	11-Conductor Extension Cable, Shielded and Prepped (for use with Remote Junction Box)
9200273	11-Conductor Extension Cable, Shielded and Unprepped (for use with Remote Junction Box)
24091-00	Low Flow Cell, 1 in. Sensor Threaded Connection, ¼ in. Process Connection
23555-00	Weatherproof Junction Box, with Preamplifier
2002565	Mounting Bracket Kit
9210012	pH 4.01 Buffer Solution, 16 oz
9210013	pH 6.86 Buffer Solution, 16 oz
9210014	pH 9.18 Buffer Solution, 16 oz
R508-8OZ	475 mV ORP Standard Solution, 8 oz
9320057	PVC Union Adapter, 1 in. FNPT
24281-00	15 ft. VP8 Cable
24281-01	25 ft. VP8 Cable
24281-02	2.5 ft. VP8 Cable
24281-03	50 ft. VP8 Cable
24281-04	100 ft. VP8 Cable
24281-05	4 ft. VP8 Cable
24281-06	10 ft. VP8 Cable
24281-07	20 ft. VP8 Cable
24281-08	30 ft. VP8 Cable



## Global Headquarters

### Emerson Automation Solutions

8200 Market Blvd

Chanhassen, MN 55317

+1 800 999 9307 or +1 952 906 8888

+1 952 949 7001

Liquid.CSC@Emerson.com

## North America Regional Office

### Emerson Automation Solutions

8200 Market Blvd.

Chanhassen, MN 55317, USA

+1 800 999 9307 or +1 952 906 8888

+1 952 949 7001

RMT-NA.RCCRFQ@Emerson.com

## Latin America Regional Office

### Emerson Automation Solutions

1300 Concord Terrace, Suite 400

Sunrise, FL 33323, USA

+1 954 846 5030

+1 954 846 5121

RFQ.RMD-RCC@Emerson.com

## Europe Regional Office

### Emerson Automation Solutions GmbH

Neuhofstrasse 19a P.O. Box 1046

CH 6340 Baar

Switzerland

+41 (0) 41 768 6111

+41 (0) 41 768 6300

RFQ.RMD-RCC@Emerson.com

## Asia Pacific Regional Office

### Emerson Automation Solutions Asia Pacific Pte Ltd

1 Pandan Crescent

Singapore 128461

+65 6777 8211

+65 6777 0947

Enquiries@AP.Emerson.com

## Middle East and Africa Regional Office

### Emerson Automation Solutions

Emerson FZE P.O. Box 17033,

Jebel Ali Free Zone - South 2


Dubai, United Arab Emirates


+971 4 8118100

+971 4 8865465


RFQ.RMTMEA@Emerson.com

 [Analyticexpert.com](http://Analyticexpert.com)

 [Linkedin.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)

 [Twitter.com/Rosemount\\_News](https://twitter.com/Rosemount_News)

 [Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

 [Youtube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)

 [Google.com/+RosemountMeasurement](https://www.google.com/+RosemountMeasurement)

The Emerson logo is a trademark and service mark of Emerson Electric Co.  
Rosemount and Rosemount logotype are trademarks of Emerson.  
All other marks are the property of their respective owners.  
© 2017 Emerson. All rights reserved.