

Increase Availability with Fisher™ V500 and CV500 Control Valves



FISHER™ Addressing the need for better control in hard-to-handle applications

Erosive applications take a toll on process availability

Availability is one of the key concerns in plants today. Repairing or replacing your valves repeatedly results in downtime and reduced productivity.

Rotary severe service is defined as rotary control valve applications in which service or process conditions lead to constant wearing of the valve. These conditions are caused by dirty, erosive, coking, corrosive, viscous, and other hard-to-handle fluids.

They can cause lack of process control, frequent maintenance, unacceptable operating life, and poor shutoff.

A control valve solution for dirty and erosive fluids

With Fisher V500 and CV500 rotary globe valves and their ability to battle erosion and control hard-to-handle fluids, you can reduce maintenance costs and increase plant availability.

Fisher V500 and CV500 rotary eccentric plug valves are designed for erosive process applications, built tough for control, and intended for performance-demanding situations. They are known for their ability to fight off the effects of hard-to-handle fluids with rugged components and application versatility. The V500 valve has been proven in tough applications across multiple industries since being introduced in 1984.



*Fisher™ V500 Control Valve Assembly with 2052 Actuator
and FIELDVUE™ DVC6200 Digital Valve Controller*




Achieve Better Control in Erosive Applications with Fisher V500 and CV500 Eccentric Plug Valves

When all other valves fail to withstand your demanding erosive, dirty, and abrasive applications, turn to Fisher V500 and CV500 valves. The V500 valve is available in a wide variety of trim materials and the CV500 valve uses a V-shaped ball to provide increased flow capacity and more precise control.



Versatile Trim Materials

With a broad range of trim options to configure in your V500 valve—from 316 stainless steel to ceramic—you get the versatility needed to meet the most severe, erosive application requirements in your unique process.

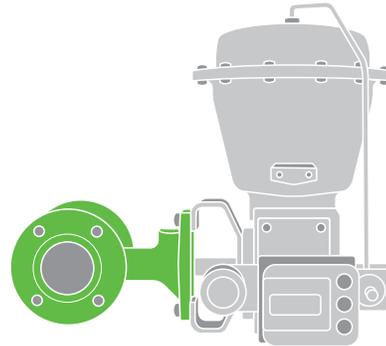

Durable Valve Design

The rugged quality of the Fisher V500 and CV500 valve construction enables longer-lasting performance so you can reduce maintenance costs and increase plant availability.


Additional Benefits of V500 and CV500 Valves

- **Extend Operating Life:** Both sides of the seat ring have a shutoff surface, allowing it to be flipped over to extend operating life. The seat ring also self-centers, self-laps, and dynamically aligns with the plug to consistently achieve the ANSI Class IV leakage protection you need.
- **Take Advantage of Reverse Flow:** For erosive applications, the recommended flow direction for V500 and CV500 valves is with the shaft upstream, so that high-velocity flow is isolated in the port or outlet area. Erosion-resistant materials help protect the seat ring and retainer for easier maintenance.
- **Achieve Higher Performance:** When coupled with a Fisher pneumatic actuator and FIELDVUE™ DVC6200 digital valve controller, the V500 or CV500 valve assembly provides excellent installed performance. It helps control closer to setpoint, extends operating life, and battles erosion effectively in your most critical processes.

Learn More

- [V500 Product Webpage](#)
- [CV500 Product Webpage](#)
- [Find an Emerson sales office near you](#)

Emerson Automation Solutions
Marshalltown, Iowa, 50158 USA
Sorocaba, 18087 Brazil
Cernay, 68700 France
Dubai, United Arab Emirates
Singapore 128461 Singapore

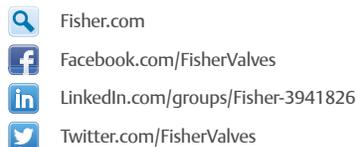

© 2018 Fisher Controls International LLC. All rights reserved. Fisher and FIELDVUE are marks owned by one of the companies in the Emerson Automation Solutions business unit of Emerson Electric Co. Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners. The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, nothing herein is to be construed as a warranty or guarantee, express or implied, regarding the products or services described herein or their use, performance, merchantability or fitness for a particular purpose. Individual results may vary. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. Responsibility for proper selection, use and maintenance of any product or service remains solely with the purchaser and end user. D352309X012 / Aug18

