


In-Line Deflagration Flame Arrester

for hydrogen/air-mixtures, concentric design,
bidirectional

PROTEGO® FA-CN-IIC

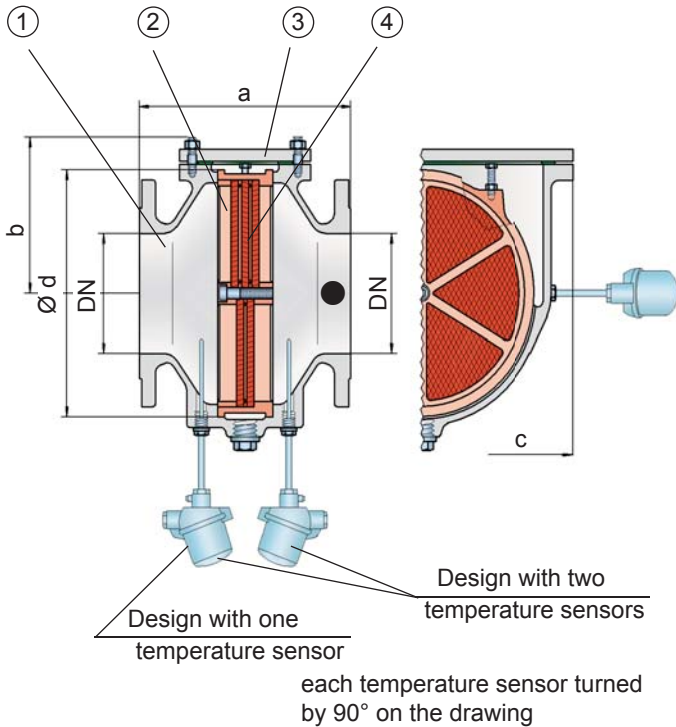

● Connection to the protected side
(only for type FA-CN-T-....)

Function and Description

The PROTEGO® FA-CN in-line deflagration flame arrester is a compact design utilizing an easy access cover for easy maintainability. The special PROTEGO® FA-CN-IIC version was developed for hydrogen applications (group IIC vapours – NEC group B). The device is designed to have comparatively large gaps, in relation to other flame arresters for the same explosion group. This allows to apply it to processes having small fluid droplets or particles. The PROTEGO® flame arrester unit can be removed and cleaned within moments without having to disassemble the pipe. When installing the deflagration flame arrester, make sure that the distance between potential ignition sources and the location of the installed device, does not exceed the L/D ratio (pipe length/pipe diameter), for which the device was approved (see table 4).

The deflagration flame arrester is symmetrical and offers bidirectional flame transmission protection. The device consists of a housing (1) with an easy access cover (3) and the PROTEGO® flame arrester unit (2) in the center. The PROTEGO® flame arrester unit is modular and consists of several FLAMEFILTER® discs (3) and spacers firmly held in a FLAMEFILTER® cage. The number of FLAMEFILTER® discs and their gap size depend on the devices intended use.

Providing the operating conditions such as the temperature, pressure, explosion group and the composition of the fluid, enables PROTEGO® to select the best deflagration flame arrester for your application. The versions of PROTEGO® FA-CN-IIC

flame arrester protects against deflagrations of fuel/air mixtures of explosion group IIC (NEC B). FA-CN devices for substances of explosion groups IIA1, IIA and IIB3 (NEC D and C (MESG \geq 0.65 mm) are shown on separate pages.

The standard design can be used up to an operating temperature of +60°C / 140°F and an absolute operating pressure up to 1.1 bar / 15.9 psi.

Type-approved in accordance with the current ATEX Directive and EN ISO 16852 as well as other international standards.

Special Features and Advantages

- state of the art protection for any hydrogen/air mixture
- can be applied to process flows with small liquid or particle load
- compact design with easy access cover
- easy maintenance without disassembling of the pipeline
- modular flame arrester unit enables individual FLAMEFILTER® to be replaced and cleaned
- bidirectional flame transmission proof design
- protects against deflagrations for all explosion groups
- lowest pressure drop results in low operating and lifecycle costs
- modular design reduces spare parts cost

Design and Specifications

There are three different designs:

Basic in-line deflagration flame arrester **FA-CN -**

In-line deflagration flame arrester with integrated temperature sensor* as additional protection against short time burning from one side **FA-CN -**

In-line deflagration flame arrester with two integrated temperature sensors* for additional protection against short-time burning from both sides **FA-CN -**

Additional special devices available upon request

*Resistance thermometer for device group II, category (1) 2 (GII cat. (1) 2)

Table 1: Dimensions

Dimensions in mm / inches

To select the nominal size (DN), use the flow capacity charts on the following pages

DN	40 / 1½"	50 / 2"	65 / 2½"	80 / 3"	100 / 4"	125 / 5"	150 / 6"	200 / 8"	250 / 10"	300 / 12"
a	210 / 8.27	215 / 8.46	235 / 9.25	240 / 9.45	265 / 10.43	305 / 12.01	310 / 12.20	300 / 11.81	320 / 12.60	350 / 13.78
b	105 / 4.13	105 / 4.13	132 / 5.2	132 / 5.2	150 / 5.91	197 / 7.75	197 / 7.75	220 / 8.66	260 / 10.24	295 / 11.61
c	200 / 7.87	200 / 7.87	260 / 10.24	260 / 10.24	308 / 12.13	415 / 16.34	415 / 16.34	446 / 17.56	520 / 20.47	600 / 23.62
d	130 / 5.12	130 / 5.12	185 / 7.28	185 / 7.28	220 / 8.66	310 / 12.20	310 / 12.20	355 / 13.98	420 / 16.54	490 / 19.29

Table 2: Selection of the explosion group

MESG	Expl. Gr. (IEC/CEN)	Gas Group (NEC)	Special approvals upon request
< 0.50 mm	IIC	B	

Table 3: Selection of max. operation pressure

DN	40 / 1½"	50 / 2"	65 / 2½"	80 / 3"	100 / 4"	125 / 5"	150 / 6"	200 / 8"	250 / 10"	300 / 12"
P _{max}	1.1 / 15.9	1.1 / 15.9	1.1 / 15.9	1.1 / 15.9	1.1 / 15.9	1.1 / 15.9	1.1 / 15.9	1.1 / 15.9	1.1 / 15.9	1.1 / 15.9

P_{max} = maximum allowable operating pressure in bar / psi absolute, higher operating pressure upon request**Table 4: Max. allowable L/D-ratio**

DN	40 / 1½"	50 / 2"	65 / 2½"	80 / 3"	100 / 4"	125 / 5"	150 / 6"	200 / 8"	250 / 10"	300 / 12"
(L/D) max	30	30	10	10	10	20	20	10	10	5
Designation	-	-	X12	X12	X12	X10	X10	X12	X12	X13


Table 5: Material selection

Design	A	B	Special materials upon request
Housing	Steel	Stainless Steel	
Cover	Steel	Stainless Steel	
Gasket	PTFE	PTFE	
Flame arrester unit	Stainless Steel	Stainless Steel	

Table 6: Flange connection type

EN 1092-1; Form B1	other types upon request
ASME B16.5; 150 lbs RFSF	






In-Line Deflagration Flame Arrester

Flow Capacity Chart

PROTEGO® FA-CN-IIC

X see table 4

DN 40 / 1 1/2"
 DN 50 / 2"
 DN 65 / 2 1/2"
 DN 80 / 3"
 DN 100 / 4"
 DN 125 / 5"
 DN 150 / 6"
 DN 200 / 8"
 DN 250 / 10"
 DN 300 / 12"

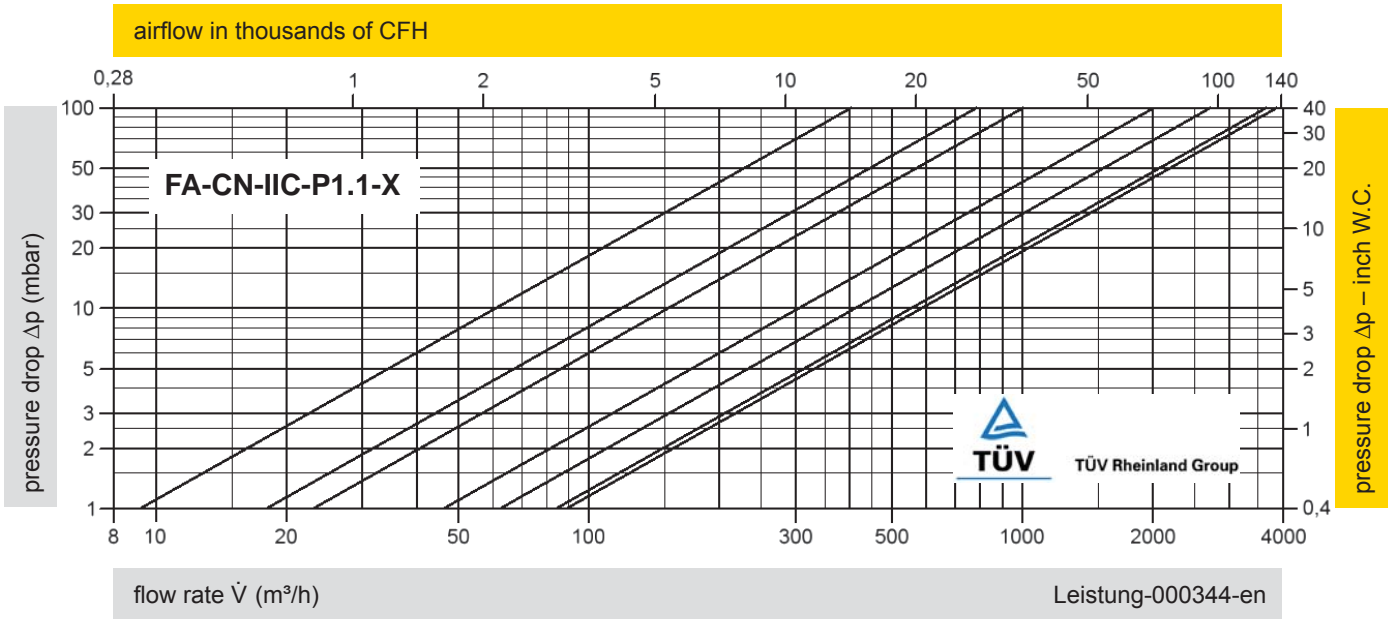

The flow capacity chart has been determined with a calibrated and TÜV certified flow capacity test rig. Volume flow \dot{V} in (m³/h) and CFH refer to the standard reference conditions of air ISO 6358 (20°C, 1bar). Conversion to other densities and temperatures refer to Vol. 1: "Technical Fundamentals".