

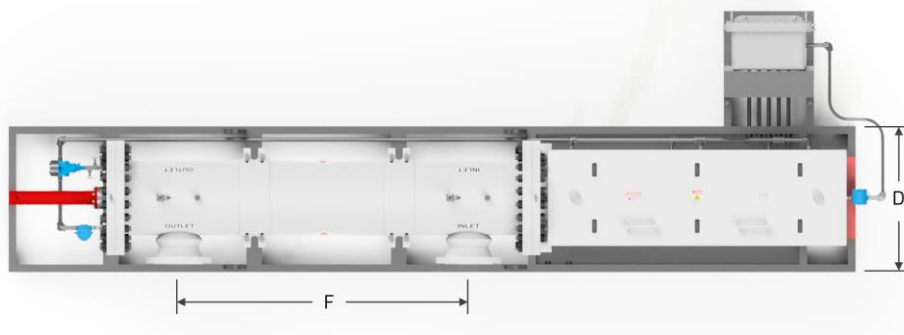


MP2600

Data Sheet



**Inlet and Outlet
Orientation
Configurable Upon
Customer Request**

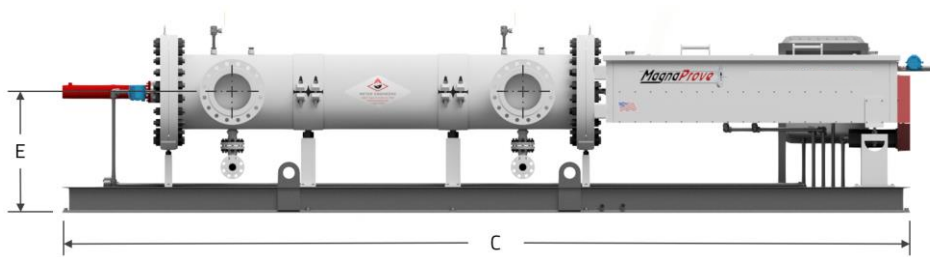

ANSI B16.5 Flange Rating	Max Working Pressure (PSI)	Max Flow Rate			Displaced Volume		I/O Size	Turndown
		GPM	BPH	M ³ /H	Gallons	Liters		
Class 150	285	1820	2600	413	15	57	4"	1200:1
Class 300	740							
Class 600	1480							
Class 900	2220							

Note 1: Max working pressure is rated for a temperature range of -20°F (-30°C) to 250°F (120°C). Per ASME/ANSI 31.4, para 404.4.1

Note 2: All pressure containing welds have been NDT tested per ASME/ANSI 31.3

ANSI B16.5 Flange Rating	Weight (+/- 5%)	Weight Filled W/ Water (+/- 5%)
Spooled		
Class 150	2860 lb / 1297 kg	3320 lb / 1506 kg
Class 300	3670 lb / 1665 kg	4140 lb / 1878 kg
Class 600	4520 lb / 2050 kg	4980 lb / 2259 kg
Class 900	6130 lb / 2781 kg	6590 lb / 2989 kg
Spoolless		
Class 150	2540 lb / 1152 kg	2990 lb / 1356 kg
Class 300	3030 lb / 1374 kg	3380 lb / 1533 kg
Class 600	3480 lb / 1579 kg	3830 lb / 1737 kg
Class 900	4360 lb / 1978 kg	4710 lb / 2136 kg

	A	B	C	D	E	F
Spooled - in (cm)						
Low Profile	39 (99)	51 (130)	212 (539)	33 (84)	26 (65)	82 (209)
Standard	46 (117)	51 (130)	212 (539)	33 (84)	33 (84)	82 (209)
Spoolless - in (cm)						
Low Profile	39 (99)	51 (130)	201 (511)	33 (84)	26 (65)	63 (159)
Standard	46 (117)	51 (130)	201 (511)	33 (84)	33 (84)	63 (159)

Note 1: Dimensions subject to change based on ANSI flange pressure rating

Note 2: All dimensions are subject to change without notice