


PROTEUS® B4 Basics



OEL8000IIIB4 System Parts List	
OEL8000IIIB4	PROTEUS® B4 Tank Gauging Controller with 7" color touch screen and (1) RS-232 port. Accepts up to 4 MTG Series inventory probes and 16 BX Series leak sensors.
MTG-*	Magnetostrictive probe (*denotes probe length, price for up to 12 ft.).
BX-LS BX-PDS	Sump sensor or doublewall sensor for steel tanks 8 feet and under. (product distinguishing version)
BX-LWF-* BX-PDWF-*	Doublewall sensor (*denotes tank diameter). (product distinguishing version)
RD7CTS	PROTEUS® Mini-Me™ universal remote ATG monitor with 7" color touch screen display for audio/visual alarms and current inventory.
RD-232C-75	75 feet RS232 cable for use with RD7CTS remote display.
RD-PCK	120 VAC power cord kit for use with PROTEUS® remote displays.
C232-422-RD7CTS	RS-232-422 Booster Kit to increase distance of RS-232 output 3,000 feet for use with RD7CTS remote display (Includes 2 converters and 2 power transformers).

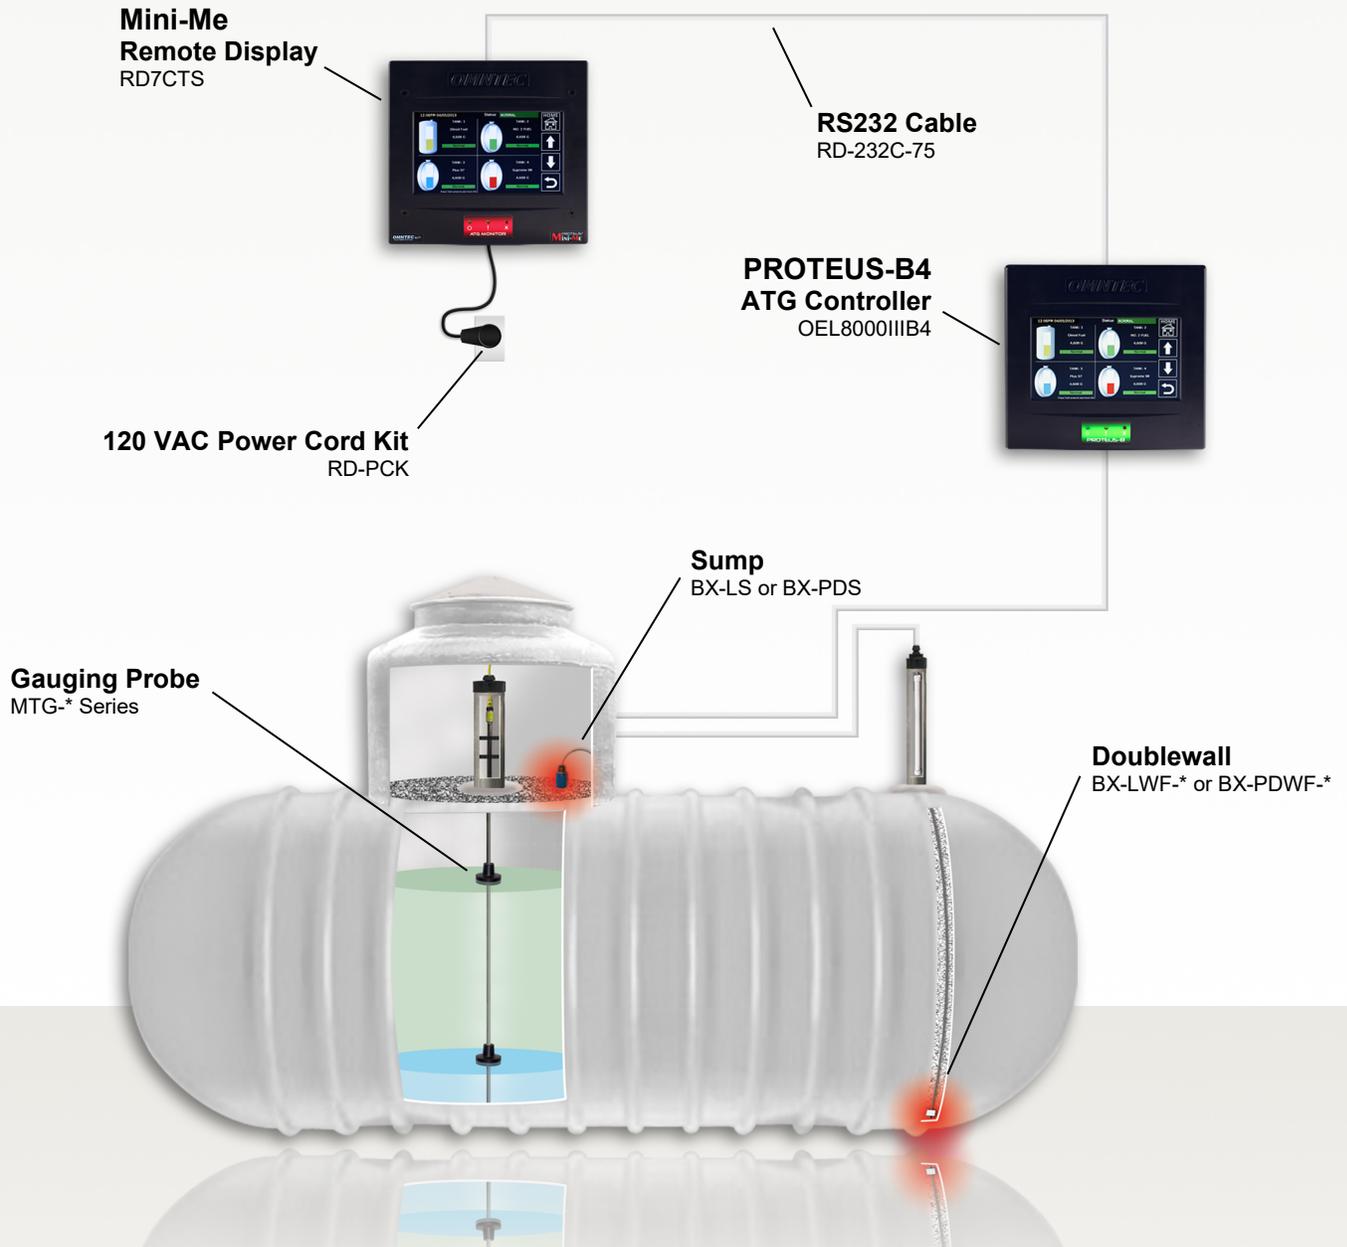